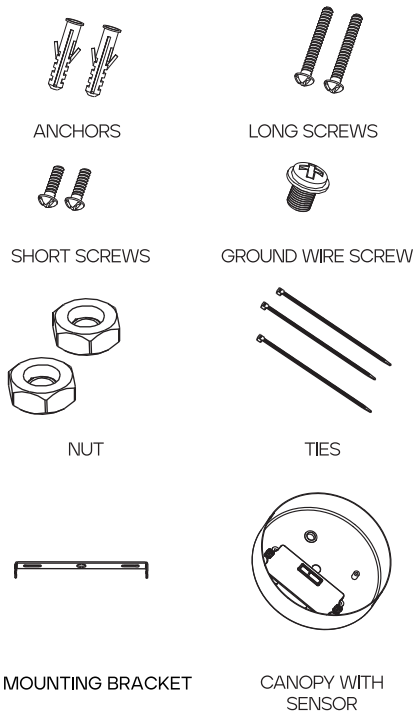
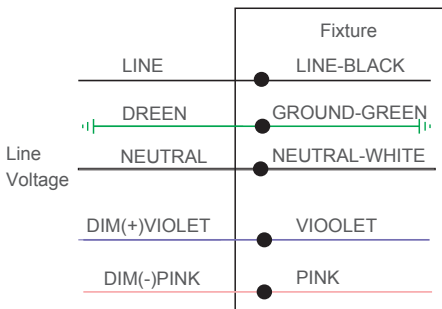



SZ-MS-ALF
Notice

- 1, Read this instruction carefully before installation
- 2, Installation should be in accordance with national and local electrical laws and regulations
- 3, Product should installed by qualified and licensed electrici
- 4, Do not install in humid places, for dry and non-humid environments only
- 5, Always turn off the power supply before installation or maintenance
- 6, To reduce the risk of fire and overheating, make sure all connections are tight
- 7, Fixtures should not covered with thermal insulation pads or similar materials at any circumstance
- 8, Do not touch the fixture if trial operation in case of danger.
- 9, Do not use out doors


Parts List

Wiring Diagram


1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation.

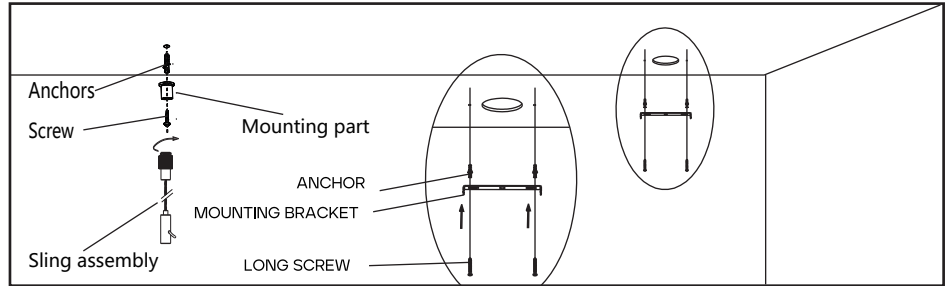
1. Make holes in the ceiling according to the model of the lamp, and fix the mounting bracket to the ceiling with screws.

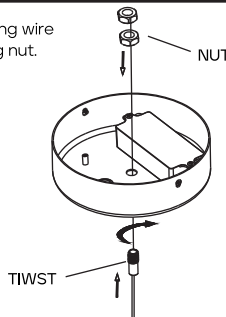


2. Secure hanging wire to canopy using nut.



2.1. Secure ground wire from power feed to canopy using ground wire screw.

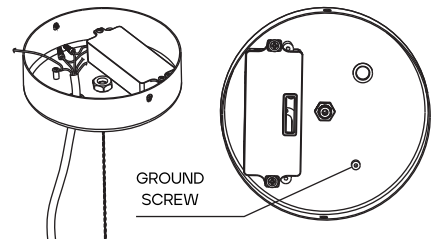


2.2. Use tie to secure power feed after passing through canopy.

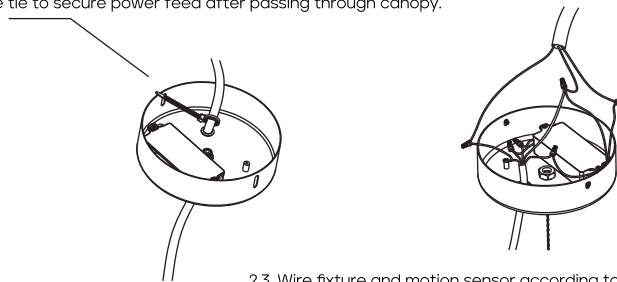


2.3. Wire fixture and motion sensor according to motion sensor instructions.

3. Secure the canopy to the mounting bracket using short screws.

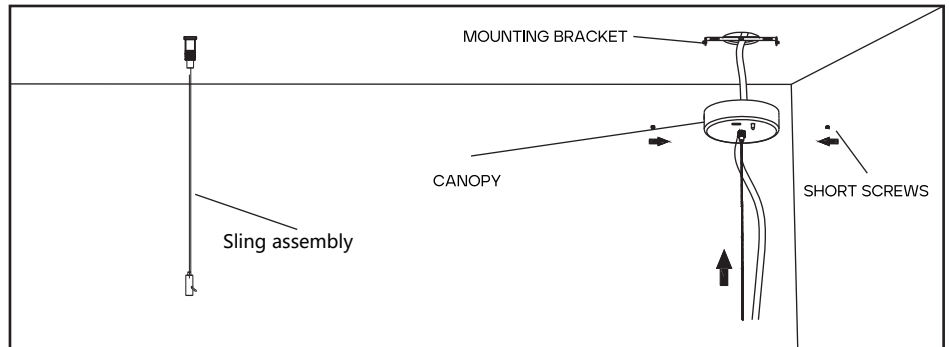


4. Refer to the lamp installation instructions for the remaining installation steps.

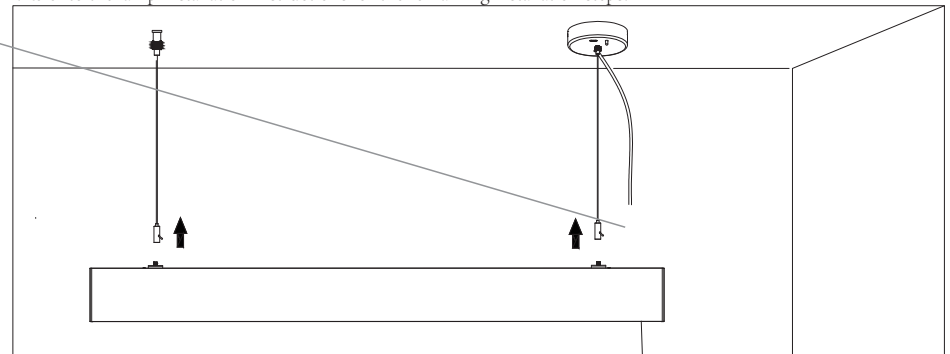


SPECIFICATIONS

Power supply	120/277VAC 50/60Hz
Maximum load @ -40°F ~ +158°F (-40°C ~ +70°C)	Resistive/Tungsten - 600W@120V Electronic Ballast (LED) - 800VA@120V/1200VA@277V
HF System	5.8GHz CW
Dim control output	0-10V, max. 25mA sinking current
Detection radius/angle	Max 26ft.(8m) /360°
Mounting height	Max 12ft
Humidity	Max. 95% RH
Temperature	-40°F ~ +158°F (-40°C ~ +70°C)

NOTE: The high-frequency output of this sensor is <math><0.2\text{mW}</math>-that is just one 5000th of the transmission power of a mobile phone or the output of a microwave oven.

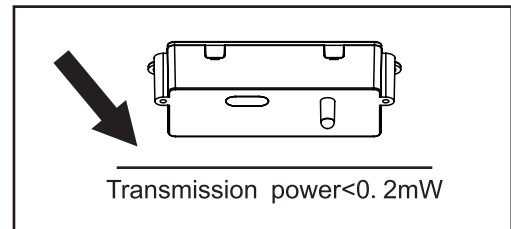

SENSOR COVERAGE

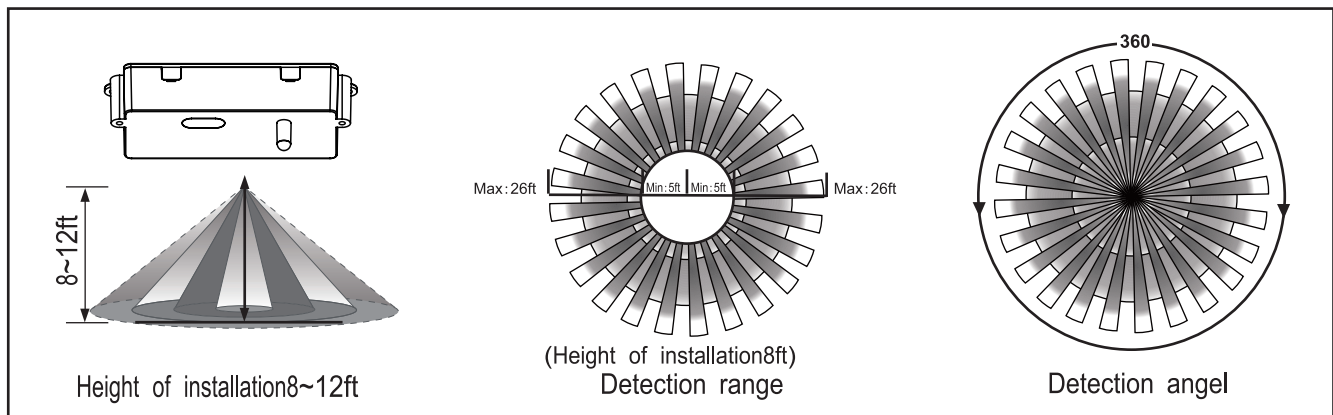

Once powering the device up, the **SZ-MS-ALF** will use factory default parameters to operate.

⚠ WARNING

NOTE: Warm up time is 15seconds. After the sensor connects input power first time, the light will keep on 15seconds, then go to dimming to work normally.

NOTE: Factory Default Setting: 100% sensitivity, Hold on time: 10seconds, Daylight sensor is 30lux, Dimming level:30%, Dimming time: 60minutes.

NOTE: Any setting changed by DIP Switch or remote control, the led light that sensor connect will on/off as confirm.

UTILIZING FIELD AND INTRODUCTION

BRI810-B-D is a moving object sensor that can detect range of 360° and it's working frequency is 5.8GHz. The advantage of this product is stable working state (stable working temperature: -40°C~+70°C), BRI810-B adopts a microwave sensor (high-frequency output <math>< 0.2\text{mW}</math>), so that it is safe and performs better than infrared sensor.

FUNCTION AND OPTIONS

The microwave sensor to achieve tri-level dimming control, for some areas that require a light change notice before switch off.

It offers 3 levels of the light Control : 100%--dimming light (0,10%,30%,50%)--off; and 2 periods of selectable waiting time: motion hold-time and stand-by time. Selectable daylight threshold and choice of detection area.



With sufficient natural light, the light does not switch on when presence detected.



With insufficient natural light, the sensor switches on the light automatically when person enters room.



People left, light still dims to 0/10%/30%/50% (options) standby level after the hold time.




Light switches off automatically after after stand-by time elapsed.

WIRING DIAGRAMS


Wiring with dimming ballast or LED driver.

Dimming Driver

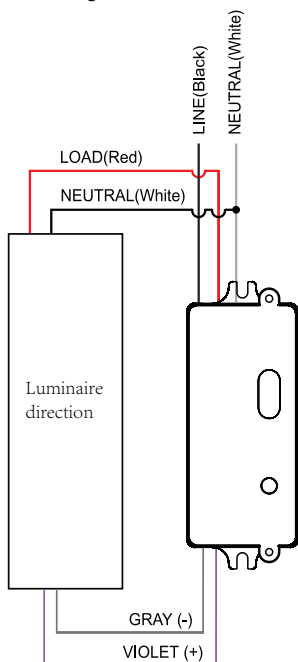


Wiring with non-dimming ballast or LED driver.

Non-Dimming Driver

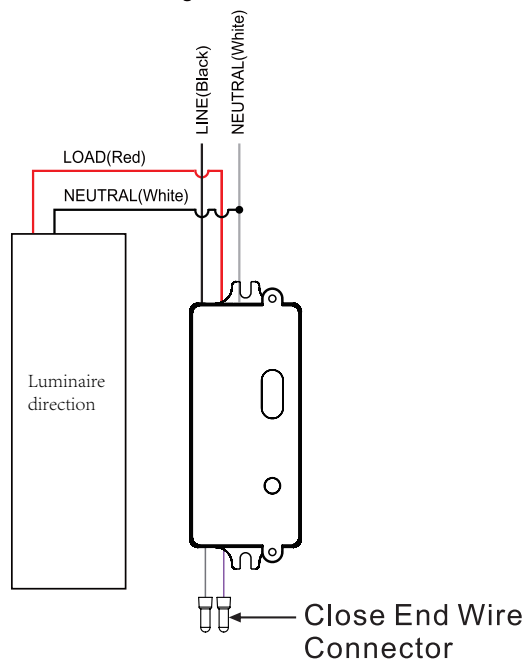


PARAMETER SETTING BY DIP SWITCH

Consider the picture: 1, 2 set sensitivity; 3, 4 set hold time; 5, 6 set the lux; 7, 8 stand-by light level ; 9, 10 set stand-by time ;

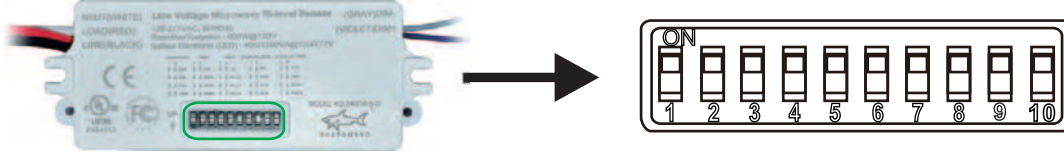

Detection Range Setting (sensitivity)

Detection range is the term used to describe the radii of the more or less circular detection zone produced on the ground after mounting the sensor light at a height of 8-20ft, pull switch to the ON position as "↑", pull switch to the OFF position as "↓", switch location and detection range of the corresponding table is as follows:

	SENSITIVITY	
	1	2
	↓ ↓	20%
	↓ ↑	50%
	↑ ↓	75%
	↑ ↑	100%

Hold Time Setting

The light can be set to stay ON for any period of time between approx. 10sec and a maximum of 15min. Any movement detected before this time elapse will re-start the timer. It is recommended to select the shortest time for adjusting the detection zone and for performing the walk test. Pull switch to the ON position as "↑", pull switch to the OFF position as "↓", switch location and hold time of the corresponding table is as follows:

	TIME	
	3	4
	↓ ↓	10S
	↓ ↑	1Min
	↑ ↓	5Min
	↑ ↑	15Min


Light-control Setting

The chosen light response threshold can be infinitely from approx. 10-50lux, pull switch to the ON position as "↑", pull switch to the OFF position as "↓", switch location and light-control of the corresponding table is as follows:

	LIGHT	
	5	6
	↓ ↓	☀ (light sensor disable)
	↓ ↑	10Lux
	↑ ↓	30Lux
	↑ ↑	50Lux

Stand-by Light Level Setting

Switch to the on is “↑”, switch to the off is “↓”; The corresponding file of switch location and stand-by level as follow:

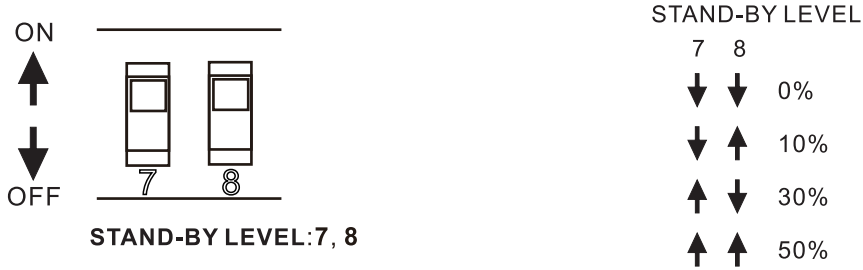

Stand-by Time Setting

Switch to the on is “↑”, switch to the off is “↓”; File of switch location and stand-by time setting as follow:

