



LED Rotatable Wall Pack

Model : SZ-RWP120W-AP-ACP



Advantage:

- UL certificate;
- IP65 Internal driver, with Photocell;
- Input voltage 120-277VAC;
- No UV or IR in the beam;
- Easy to install and operate;
- Energy saving, long lifespan;
- Light is soft and uniform, safe to eyes;
- Instant start, NO humming;
- Green and eco-friendly without mercury.



Application:

Entrance lighting, courtyard lighting;
 Industrial lighting, Outdoor landscape lighting;
 Building, The hotel;
 Wall lighting area and so on.

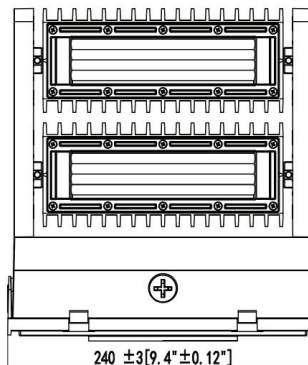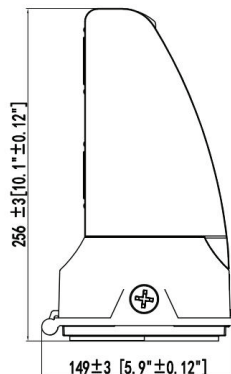

Specifications

Product name	LED Rotatable Wall Pack
Part No	SZ-RWP120W-AP-ACP
Dimension	9.4*5.9*10.1"

Technical Characteristic

Color temperature	5700K
CRI	>80
Lumen	16200LM
Lumen Efficacy	135LM/W
Input Power	Adjustable power: 120W/100W/80W
Viewing Angle	110*95deg
Input Voltage	120-277VAC, 50/60Hz
Driver model	China Brand Driver, (0-10Vdc Dimmer, Surge-protective 6KV)
Photocell	Yes
PF	>0.9
Waterproof Rating	IP65

Materials

LED Type	2835
LED QTY	132PCS
Housing	Aluminum(ADC12) +PC
Housing color	Brown

Others

Operating Temperature	-40℃ TO 45℃
Operating Humidity	100%-90% RH
Storage Temperature	-40℃ TO 80℃
Storage Humidity	10%-95%
Application	Outdoor / Indoor
Safety Certification	UL
Warranty Time	5 Years

Light Distribution Testing Parameters

Luminaire Property

Luminaire Manufacturer:
 Luminaire Category:
 Lamp Catalog:
 Number of Lamps:
 Luminous Length (mm):
 Luminous Height (mm):
 Current: 1.010 A
 Power Factor: 0.996


Luminaire Description:
 Lamp Description:
 Lumens per Lamp:
 Luminous Width (mm):
 Voltage: 120.0 V
 Power: 120.67 W

Photometric Results


IES Classification: Type II
 Total Rated Lamp Lumens: 15213.2 lm
 Efficiency: 100%
 Upward Ratio: 1%
 C0r0 Intensity: 5234.67 cd
 Pos of Max. Intensity: H90 V40
 Beam Angle(C0/C180,C90/C270,C45/C225,C135/315): 93.2, 93.9, 108.4, 107.9

Longitudinal Classification: Very Short
 Measurement Flux: 15213.2 lm
 Downward Ratio: 99%
 Luminaire Efficacy Rating (LER): 126.12
 Max. Intensity: 7107.64 cd

Luminous Intensity Distribution Curve

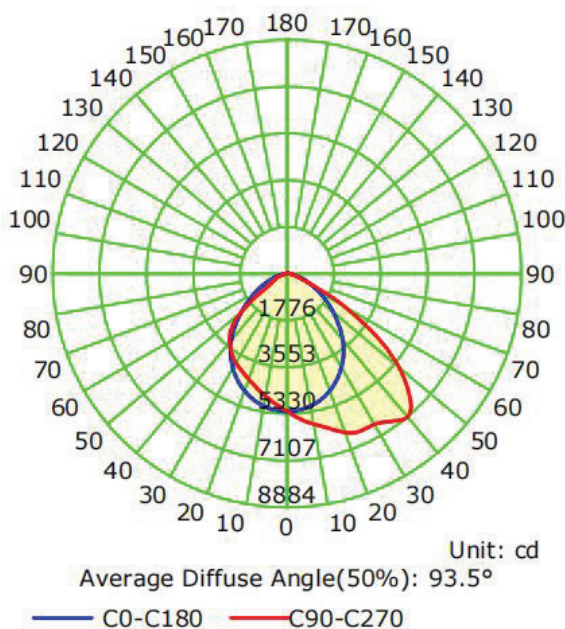

The Average Illuminance Effective Figure

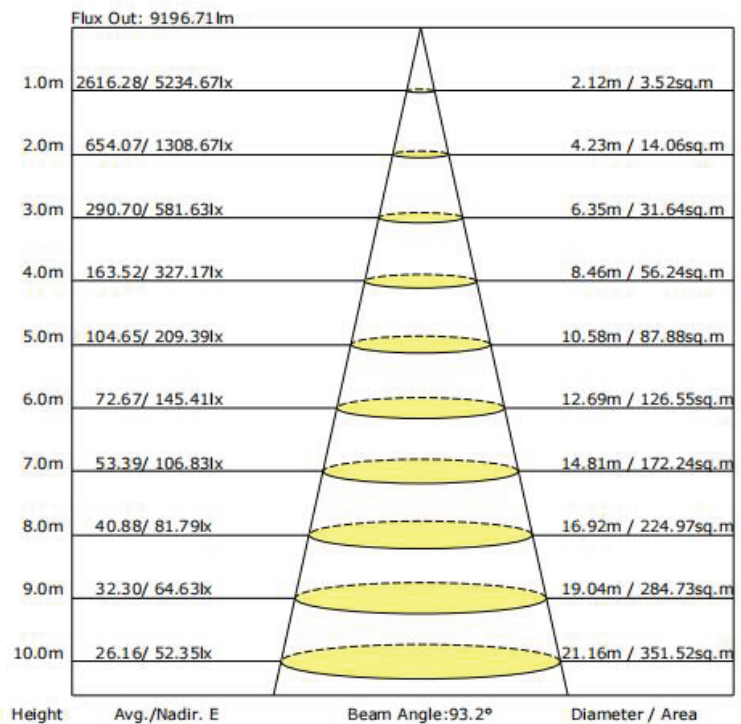

Package

Lamps Net Weight: 2.7kg / pcs

Model	Size	Qty/ Carton	Weight/ Carton
SZ-RWP120W-AP-ACP	16.34*12.2*12.6"	2	7.5KG

