



LED Vapor Tight Light

SZ-VT25W-2FT-ACP

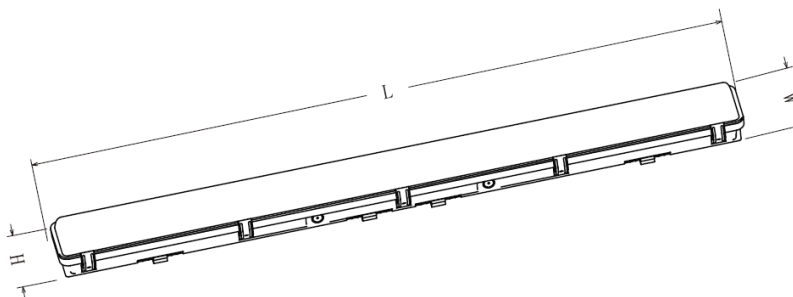
Advantage:

- ETL&DLC certificate
- 2835 Chip, CRI 80
- Input voltage 120-277VAC
- Ingress Protection:IP65
- Easy to install and operate
- Energy saving, long lifespan
- Adjustable CCT and power
- Green and eco-friendly without mercury.



Application:

Wet areas, Outside walkways, Warehouses, Storage areas,
Industrial units, Garages, Workshops, Car parks.



Model	L*W*H (mm/in)
SZ-VT25W-2FT-ACP	600*110*88/23.62*4.33*3.46

Product Specifications

Product Name	LED Vapor Tight
Light Type	SZ-VT25W-2FT-ACP
Dimension	600*110*88mm

Technical Characteristic

Color temperature	Adjustable CCT:3000K/3500K/4000K/5000K/6500K
CRI	>80
Lumen Efficacy	140LM/W
Input Power	Adjustable Power:15W/20W/25W
Viewing Angle	120 Degree
Input Voltage	120-277V 50/60Hz
Driver model	China Brand driver, (0-10Vdc Dimmer)
PF	>0.9
Waterproof Rating	IP65

Materials

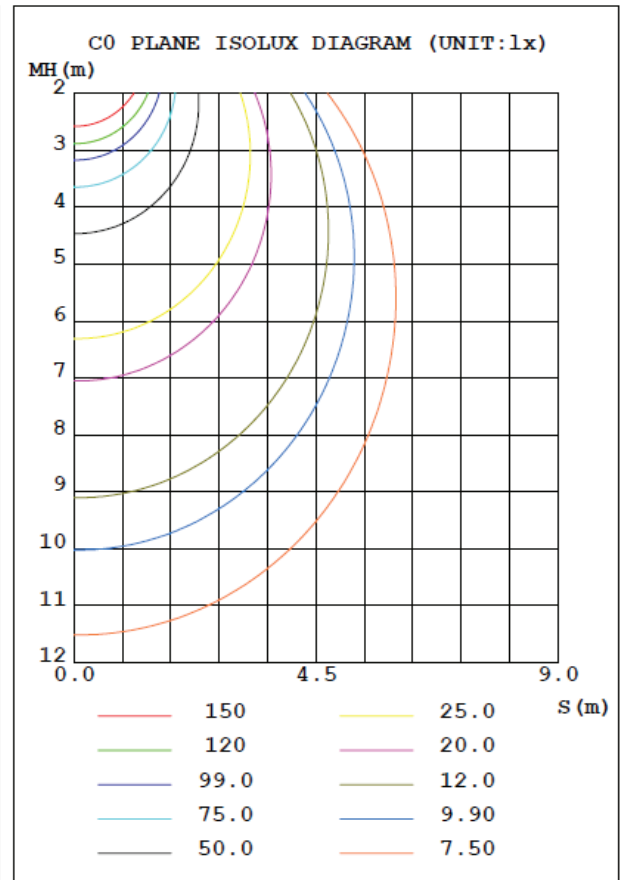
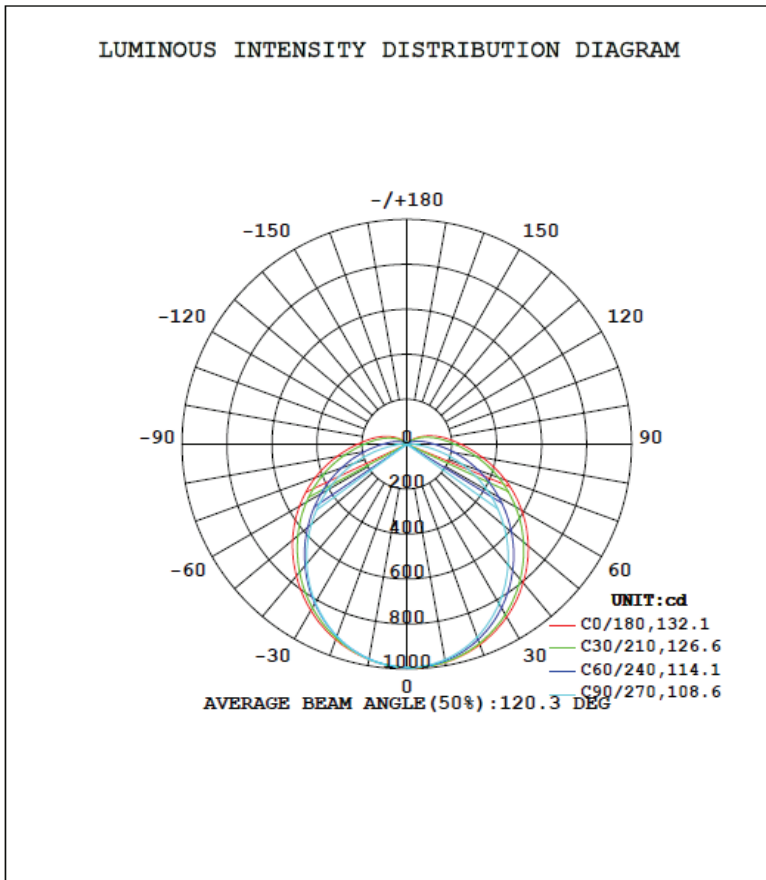
LED Type	2835
LED QTY	392PCS
Housing	PC
Housing color	Gray
Cover	PC Milky
Operating Temperature	-40°C TO 45°C
Operating Humidity	10%-90% RH
Storage Temperature	-40°C TO 80°C

Others

Storage Humidity	10%-95%
Application	Outdoor
Safety Certification	ETL&DLC
Warranty Time	5 Years

Luminaire photometric

DATA OF LAMP		PHOTOMETRIC DATA <i>Eff: 148.04 lm/W</i>			
MODEL	SZ-VT25W-2FT-ACP	I _{max} (cd)	995.2	S/MH (C0/180)	1.28
NOMINAL POWER (W)	25	LOR (%)	100.0	S/MH (C90/270)	1.22
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	3532.8	η UP, DN (C0-180)	4.3, 46.1
NOMINAL FLUX (lm)	3532.77	CIE CLASS	DIRECT	η UP, DN (C180-360)	4.1, 45.4
LAMPS INSIDE	1	η up (%)	8.4	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	η down (%)	91.6	CIBSE SHR MAX	1.35


Package

Model	Net Weight	Size	Qty/Carton	Weight/Carton
SZ-VT25W-2FT-ACP	6.5KG	667*505*350MM	12	7.5KG