


Features :

- Input Voltage:120-277VAC 50/60Hz.
with Emergency LED driver
- ETL & DLC 5.1 certified.
- 130lm/W high lumen efficacy, 80+ CRI.
- 0-10V Dimmable LED driver.
Adjustable CCT: 4000K/5000K/6000K
Adjustable Power: 40W/50W/72W.
- High efficiency LM80 SMD LEDs.
- Designed for 50,000 hours lifetime.
- Instant startup, soft light, no glare, no noise.
- Easy for installation.

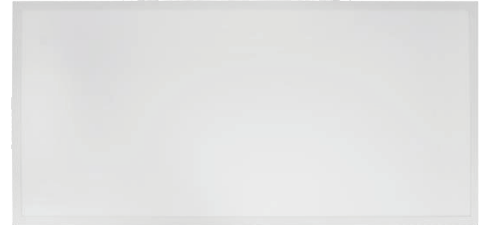


Application:

- ◆ Factory, offices .
- ◆ Living room, clubs, lobbies.
- ◆ Supermarkets, school, hotel.
- ◆ Exhibitions, etc..



Product Dimension:

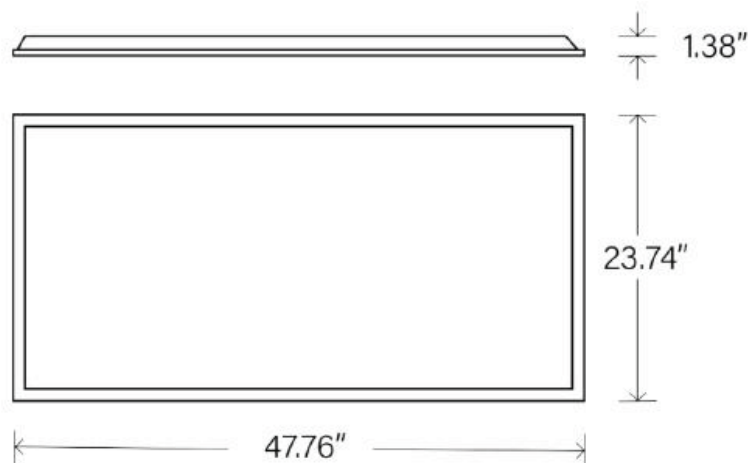

Specifications

LED Troffer Light

Model:	SZ-PL24-72W-ACP (EM)
Wattage:	40W/50W/72W
CCT:	4000K/5000K/6000K
Input Voltage:	120-277VAC 50/60hz
Power Factor:	>0.9
Efficacy:	125LM/W
CRI:	>80
THD:	<20
Dimmable:	Yes
Dimensions:	2*4FT
Warranty:	5 years
Beam Angle:	120°
Operating Temperature:	-20°C to 50°C
IP Grade:	IP20
Certification:	ETL, DLC5.1
Emergency LED Driver	Max 8W, Recharge time: \geq 24Hrs, Discharge time :90minutes

Package


Size	Qty/Carton	Gross Weight	Net Weight
49.09*11.81*25.31"	6	29.35Kg	24.9Kg

Installation instructions



Recessed installation

2*4FT Panel

1. Replace existing lighting fixture from ceiling with LED Panel.

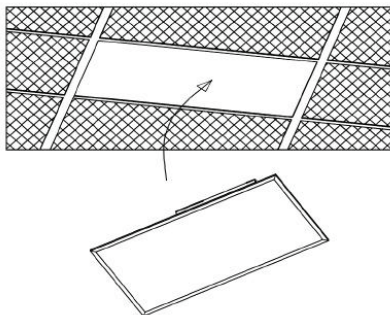


2. Use the protective brackets for the sake of safety.

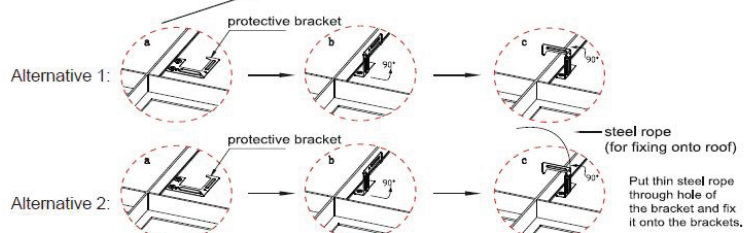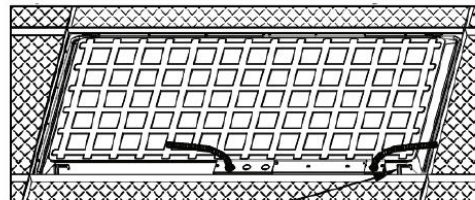


Installation Guide


1. Unscrew the driver cover.

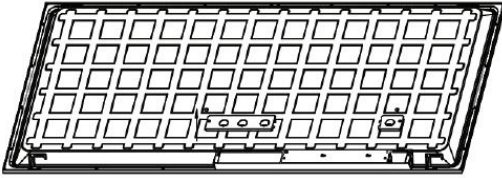

2. Connect the conduit to the driver box

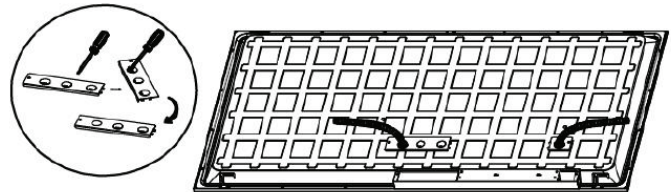

3. Connect other wires separately.

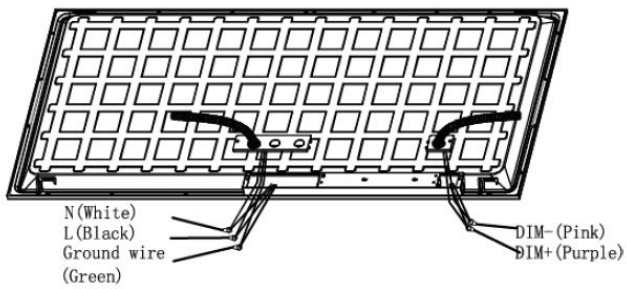

4. Put back the driver cover and fix it by screw. Select adjustable power and color temperature

