


SZ-T8-4FT-24 (G13 ACP AB)



General Specifications


Model Number	SZ-T8-4FT-24 (G13 ACP AB)
Cap-Base	G13
LED Type/Qty	SMD2835 / 288 PCS
Power	Adjustable: 10W/12W/15W/18W/24W
Product Size	4FT
Lumen Flux	Max 3120LM 130LM/W
Color Temp (6CCT)	Adjustable: 3000K/3500K/4000K/5000K/6000K/6500K
Main Material	Aluminum & PC Cover Clear/Stripy/Milky
Beam Angle	>120°
Warranty	5 Years
Lifespan	50,000 Hour

Electrical Specifications

Installation	Type A+B, Plug & Play Compatible Electronic Ballast & ballast bypass, Direct wire, Single-End or Double-End Input.
--------------	--

Input Voltage	AC100-277V
Frequency	50/60Hz
Power Factor	>0.9
Application	
Application	Indoor use
Environment	-20° C~40° C/10%~90%RH
Certification	
Certification	UL
Packing	
Package	25pcs/carton
Gross Weight	7.2kg/carton
Net Weight	6.5kg/carton
Package Size	48.62*7.28*7.28"

Dimension: 4FT,48 x 1.12 x 1.28"

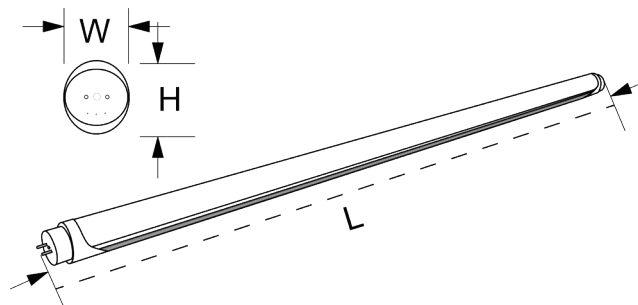

Warranty

This product has a warranty of period of 3 years from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering or removal of the Q.C. and/or date label, usage in improper working environment or installation not according to the current edition of the National Electric Code. Should this product fail during the warranty period it will be replaced free of charge, subject to correct installation and return of the faulty unit. Manufacturer does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in your country of purchase. Manufacturer reserves the right to alter specifications without prior notice.

Note

1. The installation and maintenance must be completed by electricians or professionals.
2. Please cut off the power before installation and maintenance.
3. The thermally insulating material is not allowed to cover the fixture.
4. Please keep away from the corrosive substance, and keep the fixture dry and clean.
5. Working temperature: -4° F~104° F, storage temperature: -22° F~140° F.